


NORTH HIGH TECH CO.LTD



Create value for customer, increase welfare for employee,  
create fortune for society

## Contents

|                                  |    |
|----------------------------------|----|
| Fiber Cement Board.....          | 2  |
| Calcium Silicate Board .....     | 4  |
| Magnesium Oxide Board .....      | 6  |
| Sandwich Panel.....              | 8  |
| Colored Fiber Cement Board ..... | 10 |
| Fiber Cement Ceiling Tile .....  | 12 |

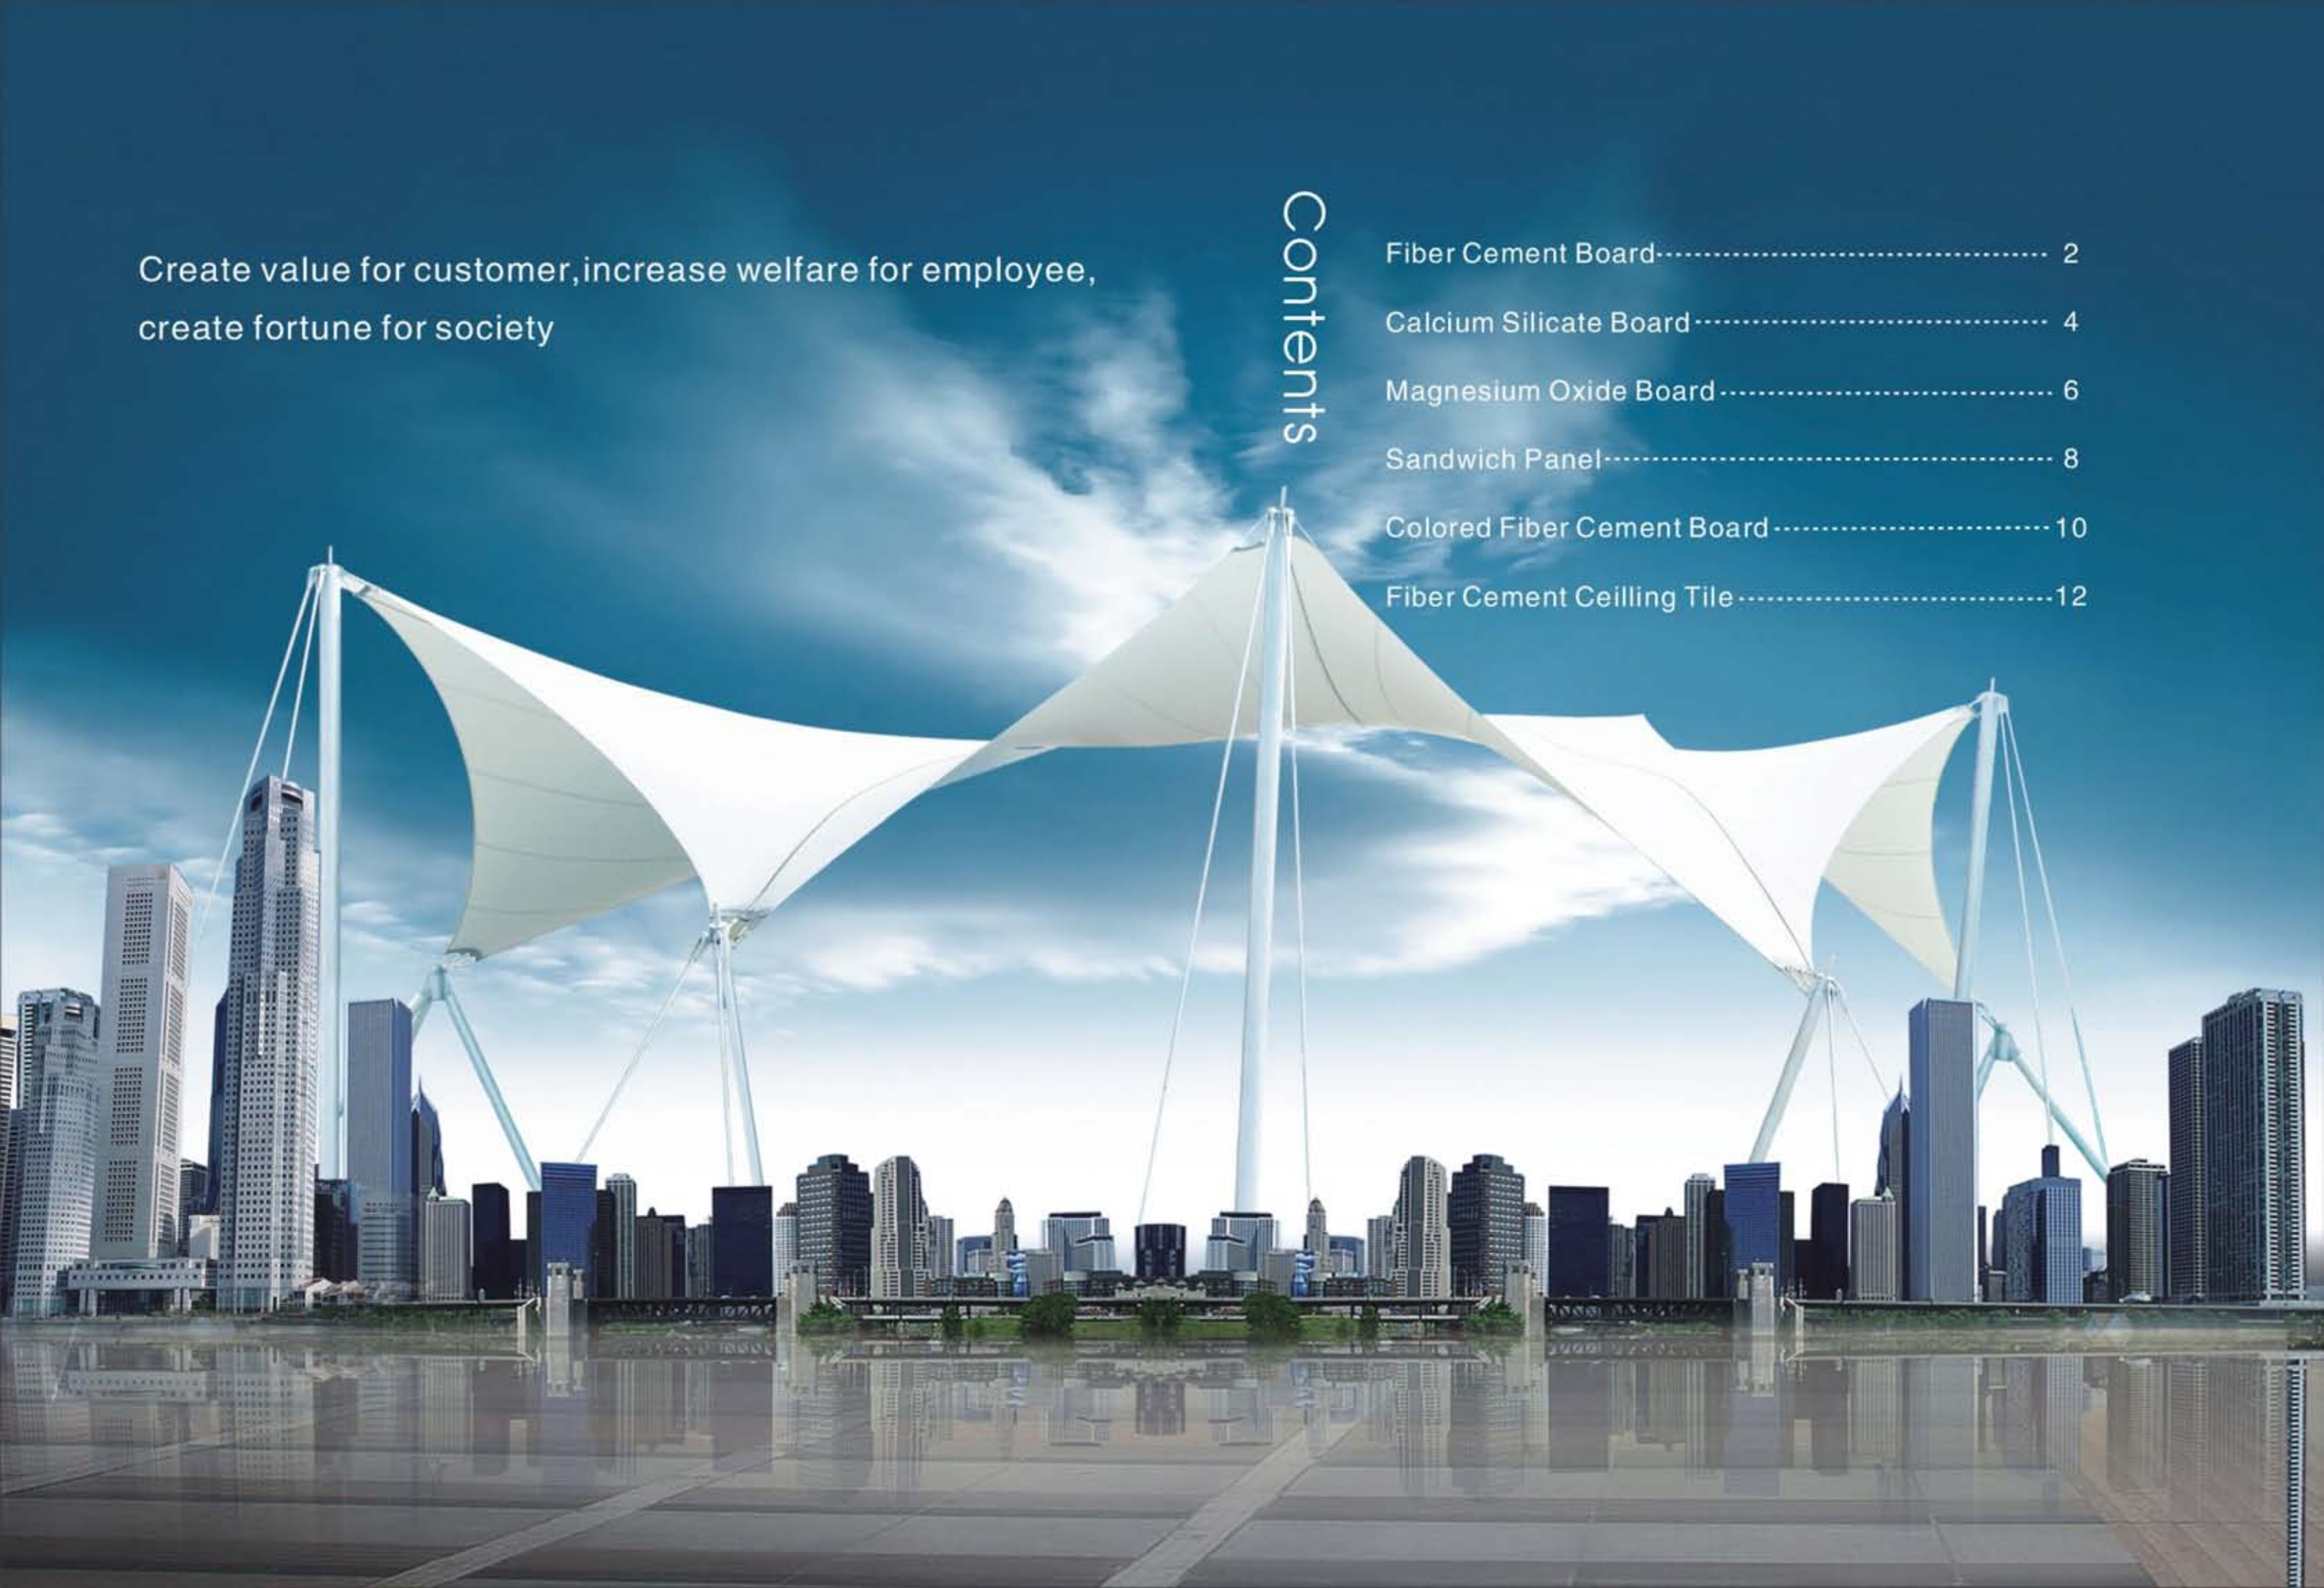



Fiber Cement Board

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| Raw Materials        | Cement, Quartz Sand, Fiber                                       |
| Standard Size        | 1220mmx2440mm or 1200mmx2400mm                                   |
| Max Width            | 1220mm                                                           |
| Max Length           | 3000mm                                                           |
| Thickness            | 4.5-20mm                                                         |
| Density              | 1.25-1.50g/cm <sup>3</sup>                                       |
| Color                | Grey                                                             |
| Water Content        | ≤10                                                              |
| Water Absorption     | ≤28                                                              |
| Fire Resistance      | Incombustibility A1 Class                                        |
| Thermal Conductivity | Average ≤0.20W/MK                                                |
| Bending Strength     | Transverse ≥11.0N/mm <sup>3</sup> Vertical ≥8.5N/mm <sup>3</sup> |
| Radioactivity        | Conforming to GB6566-2001 A Class                                |
| Certification        | SGS/CE                                                           |
| Packing              | Wooden pallet                                                    |






Calcium Silicate Board

|                      |                                                               |
|----------------------|---------------------------------------------------------------|
| Raw Materials        | Tobermorite,Cement,Quartz,Fiber                               |
| Standard Size        | 1220mmx2440mm or 1200mmx2400mm                                |
| Max Width            | 1220mm                                                        |
| Max Length           | 3000mm                                                        |
| Thickness            | 4.5-20mm                                                      |
| Density              | 1.00-1.25g/cm <sup>3</sup>                                    |
| Color                | Light yellow                                                  |
| Water Content        | ≤10                                                           |
| Water Absorption     | ≤40                                                           |
| Fire Resistance      | Incombustibility A1 Class                                     |
| Thermal Conductivity | Average≤0.20W/MK                                              |
| Bending Strength     | Transverse≥8.5N/mm <sup>3</sup> Vertical≥6.0N/mm <sup>3</sup> |
| Radioactivity        | Conforming to GB6566-2001 A Class                             |
| Certification        | SGS                                                           |
| Packing              | Wooden pallet                                                 |



Magnesium Oxide Board

|                  |                                                                             |
|------------------|-----------------------------------------------------------------------------|
| Raw Materials    | magnesium oxide, magnesium chloride, perlite, fiber glass mesh, wood fibers |
| Standard Size    | 1220mmx2440mm or 1200mmx2400mm                                              |
| Max Width        | 1220mm                                                                      |
| Max Length       | 3000mm                                                                      |
| Thickness        | 3-20mm                                                                      |
| Density          | 0.85-1.00g/cm <sup>3</sup>                                                  |
| Color            | White                                                                       |
| Water Content    | ≤20                                                                         |
| Water Absorption | ≤40                                                                         |
| Fire Resistance  | Incombustibility A1 Class                                                   |
| Certification    | SGS/CE                                                                      |
| Packing          | 1:Wooden pallet 2:in bulk                                                   |

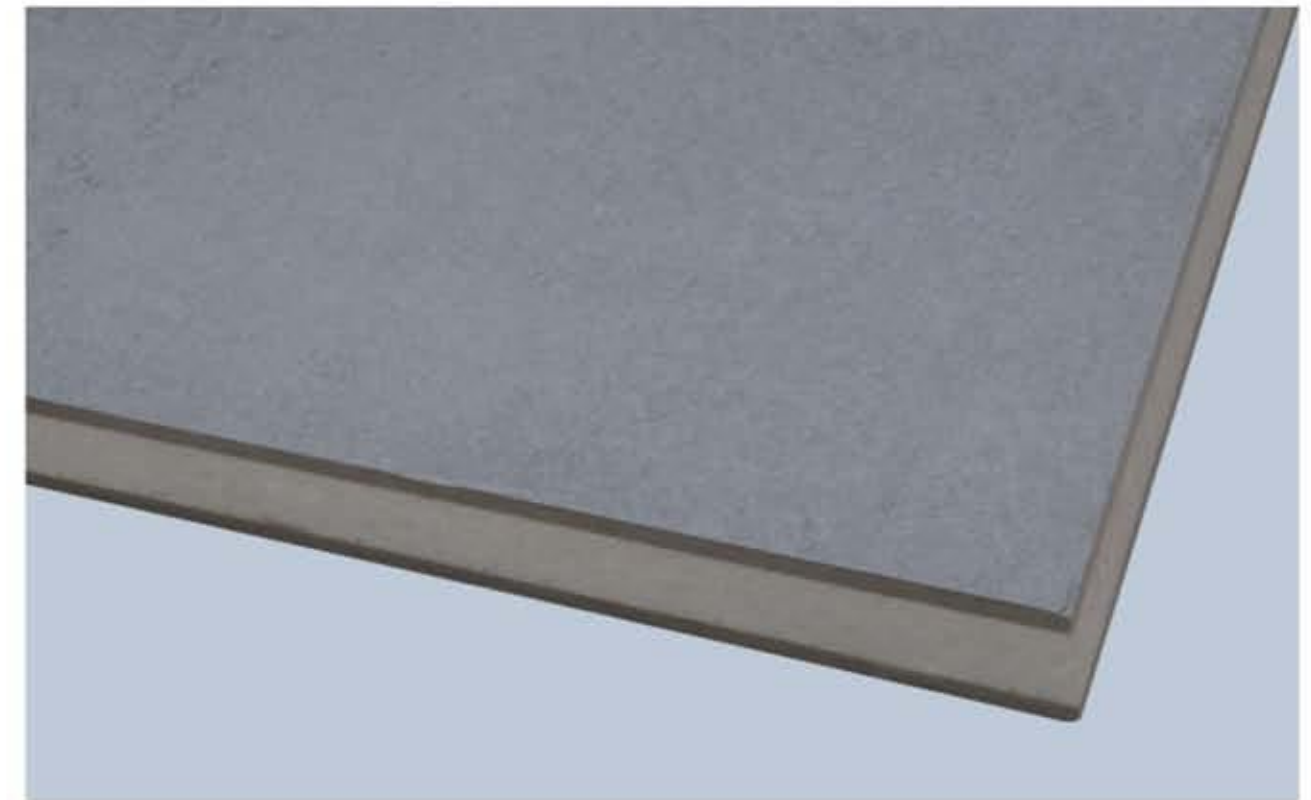

Sandwich Panel

|             | Sandwich panel | Basic board + core + basic board |                                |                                |
|-------------|----------------|----------------------------------|--------------------------------|--------------------------------|
|             |                | EPS/XPS                          | EPS/XPS                        | EPS/XPS                        |
| Core        | Thickness      | 50mm-100mm                       | 50mm-100mm                     |                                |
|             | Density        | 10-40g/cm <sup>3</sup>           | 10-40g/cm <sup>3</sup>         |                                |
| Basic board |                | Fiber Cement Board               | Calcium Silicate Board         | Mgo Board                      |
|             | Thickness      | 6mm-12                           | 6mm-12mm                       | 3mm-12mm                       |
|             | Density        | 1.25-1.50g/cm <sup>3</sup>       | 1.00-1.25g/cm <sup>3</sup>     | 0.85-1.00g/cm <sup>3</sup>     |
|             | Standard size  | 1220mmx2440mm<br>1200mmx2400mm   | 1220mmx2440mm<br>1200mmx2400mm | 1220mmx2440mm<br>1200mmx2400mm |
|             | Max width      | 1220mm                           | 1220mm                         | 1220mm                         |
|             | Max length     | 3000mm                           | 3000mm                         | 3000mm                         |
|             | Color          | grey                             | light yellow                   | white                          |
| Packing     | Wooden pallet  |                                  |                                |                                |



Colored Fiber Cement Board

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| Raw Materials        | Cement, Quartz Sand, Fiber                                       |
| Standard Size        | 1220mmx2440mm or 1200mmx2400mm                                   |
| Max Width            | 1220mm                                                           |
| Max Length           | 3000mm                                                           |
| Thickness            | 6-20mm                                                           |
| Density              | 1.25-1.50g/cm <sup>3</sup>                                       |
| Color                | white, yellow, light green, brick red                            |
| Water Content        | ≤10                                                              |
| Water Absorption     | ≤28                                                              |
| Fire Resistance      | Incombustibility A1 Class                                        |
| Thermal Conductivity | Average ≤0.20W/MK                                                |
| Bending Strength     | Transverse ≥11.0N/mm <sup>3</sup> Vertical ≥8.5N/mm <sup>3</sup> |
| Radioactivity        | Conforming to GB6566-2001 A Class                                |
| Certification        | SGS/CE                                                           |
| Packing              | Wooden pallet                                                    |

## Fiber Cement Ceiling Tile

## Printing Series



YHP1801




YHP1802



YHP1803



YHP1811



YHP1805



YHP1806




YHP1807



YHP1812



YHP1808



YHP1809




YHP1810




YHP1813


## Knurling Series




YHB1801



YHB1802



YHB1803



YHB1805

## Embossment Series



YHA1801



YHA1802



YHA1803



YHA1805



YHA1806




YHA1807





YHA1808

## Acoustic Absorption Series

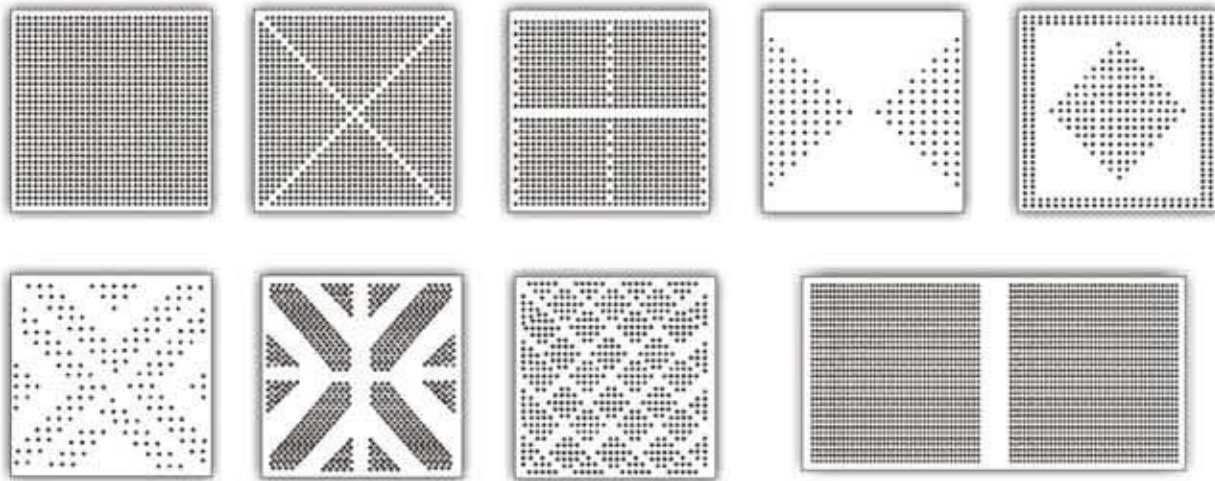

## Installation

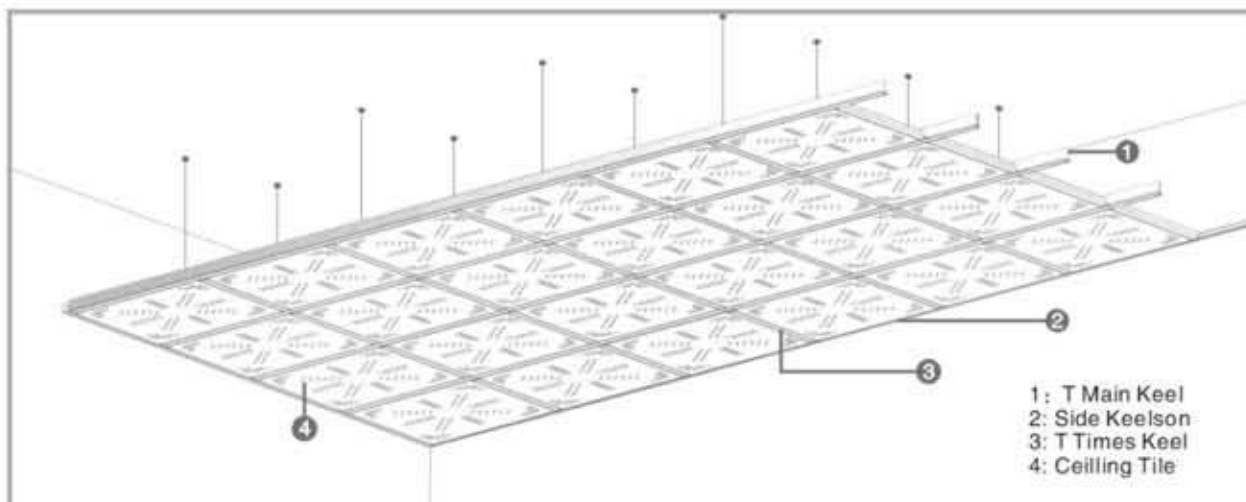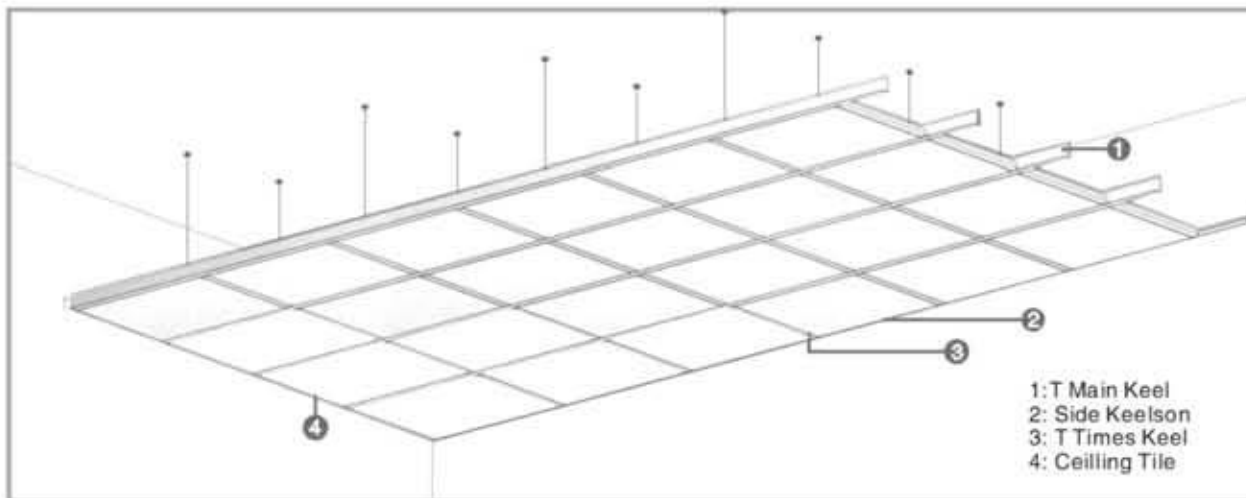

## NOTE

This image shows a full page of handwriting practice paper. It features multiple sets of horizontal dashed lines spaced evenly down the page, providing a guide for letter height and placement. The background is white, and the lines are black. There are no margins, text, or other markings on the page.